



XM40-Qx20Lx

40-channel Multiplexer/Demultiplexer
with Test Channel & Monitoring POR



Features

- High density packing for full C band
- Compliant with ITU-T G.694.1 100 GHz DWDM transceivers
- Integrated 1625 nm optical test path
- Fits into EIA 19", 23" and ETSI 300 mm racks
- No electrical power is required; immune to EMI/EMC and ESD

Applications

- Terminal mux/demux in high capacity optical transmission systems
- In-service optical test of DWDM interconnect
- Terminating linear and ring networks in conjunction with add/drop optics

Compliances

- ITU-T G694.1
- GR-1221 and 1209

Description


The WaveReady 40-channel Multiplexer/Demultiplexer (DWDM Mux/Demux-40) is a scalable high-capacity terminal Dense Wavelength Division Multiplexing (DWDM) solution allowing up to 40 wavelengths to be multiplexed to a fiber pair.

This multiplexer maximizes the capacity of the C-band range by providing access to 40 x 100 GHz spaced channels. In conjunction with the WaveReady line of transponders and amplifiers the DWDM Mux/Demux-40 supports a wide range of architectures from simple point-to-point to amplified ring configurations with dynamic add/drop.

An integrated test path is built into each module allowing for in-service integration of optical line diagnostics and


With high channel uniformity, low insertion loss and low chromatic dispersion, the DWDM UMUX 40 is compatible with all digital transmission formats and data rates up to 40 Gb/s.

Network Example

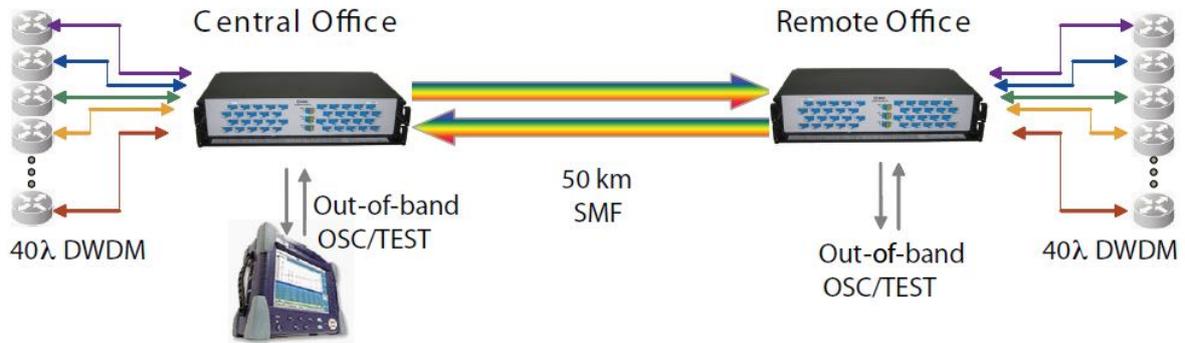


Point to point link with Optical Monitoring


Functional Diagram

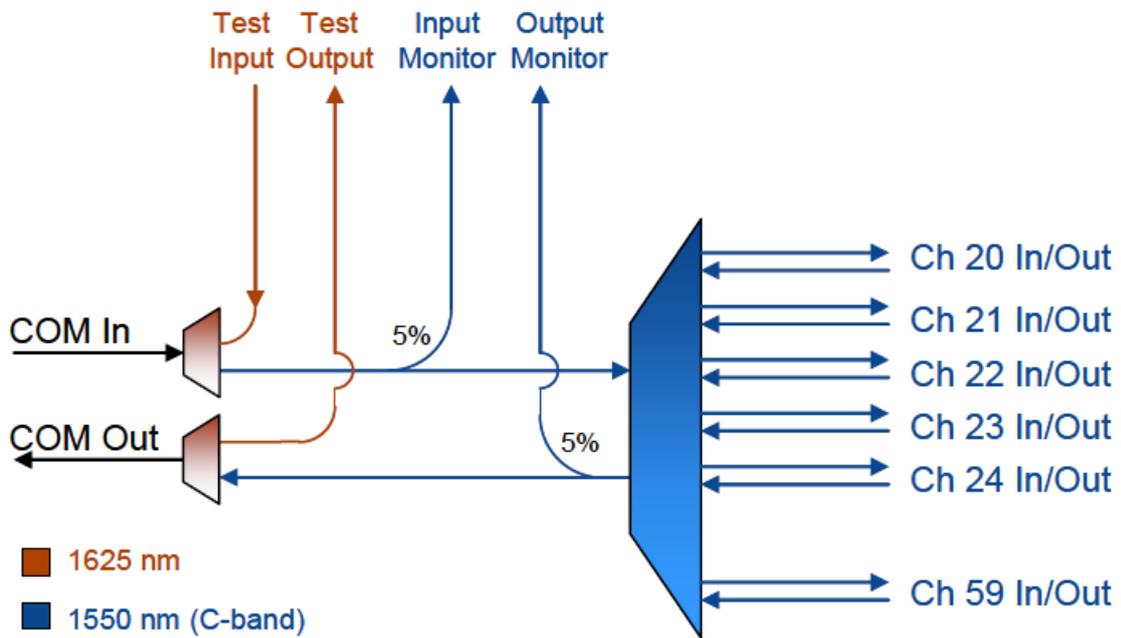

Sample Application: TBERD 8000 Optical Fiber Test Integration

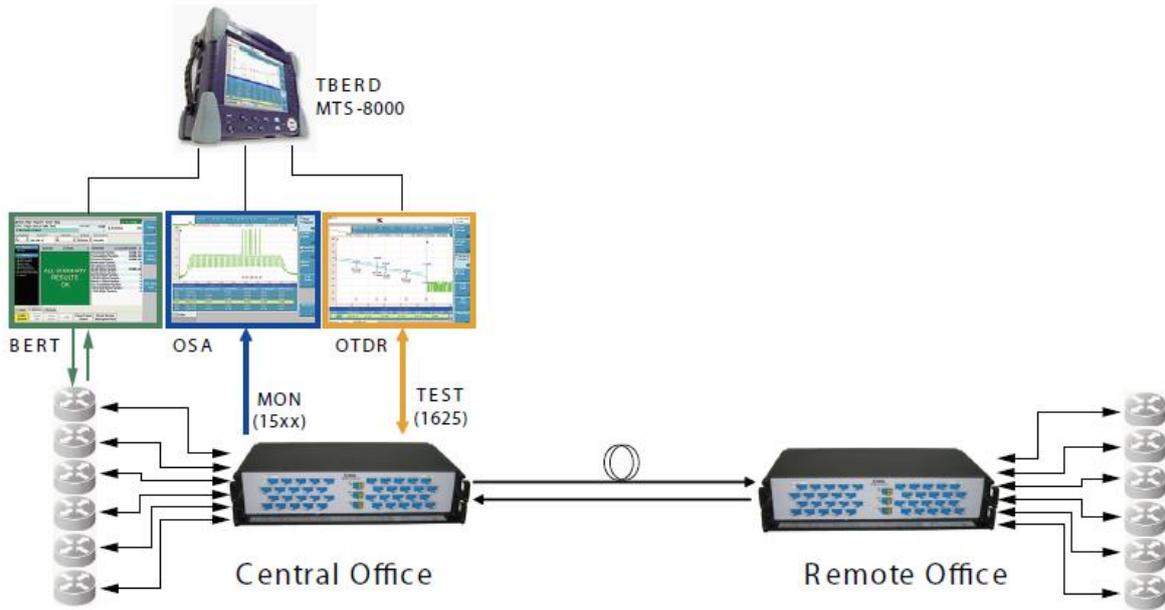

Sample Application: BrightJack 200 Optical Link Monitoring

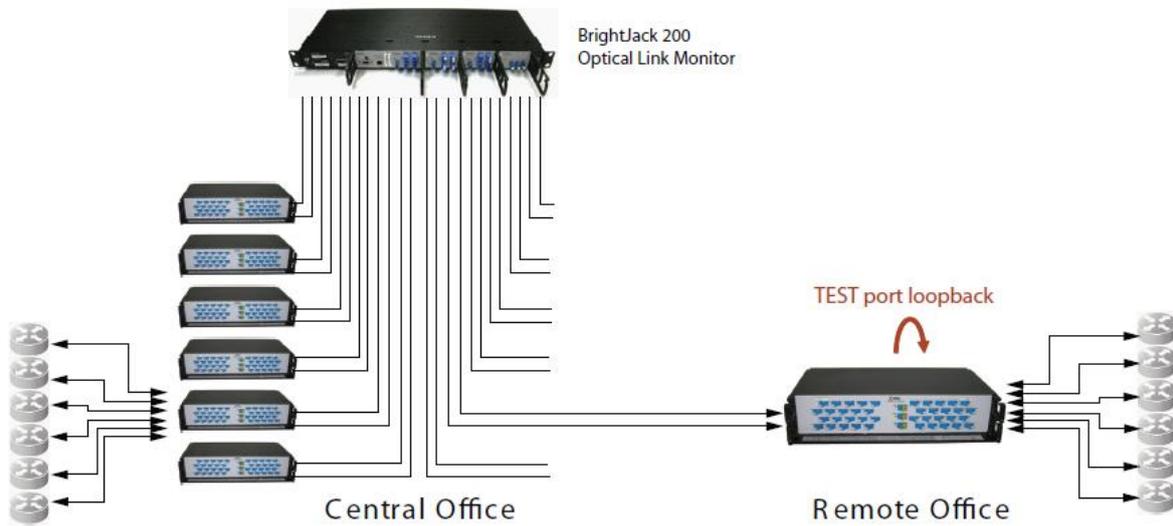

Specifications¹

Parameter	Min	Typical	Max
Optical Characteristics			
DWDM Channel Spacing		100 GHz	
DWDM Channel bandwidth		ITU0.1 nm	
DWDM Mux/Demux Insertion loss		4 dB	6 dB
DWDM Channel non-uniformity			1.5 dB
Adjacent DWDM channel isolation	24 dB		
Non-adjacent DWDM channel isolation	33 dB		
DWDM Monitor tap ratio	11 dB	13 dB	15 dB
Test Channel Wavelength Range	1600 nm		1650 nm
Test Channel Insertion Loss		0.7 dB	1 dB
Polarization dependent loss			0.5 dB
Polarization mode dispersion			0.5 ps
Optical return loss	40 dB		
Input optical power – sum of all DWDM channel ports			250 mW
Test port optical power			500 mW
Physical Characteristics			
Size (H W L) including 19" mounting brackets		3.48 in 19.0 in 11.02 in	
Rack mounting options for MDX-20UX10xxB		ETSI, 19 or 23 inch rackmount	
Optical connector type (all ports)		Duplex LC/PC bulkhead	
Environmental Characteristics			
Operating ambient temperature (short term)	-5 °C	—	+55 °C
Operating ambient temperature (extended term)	+10 °C	—	+40 °C
Storage temperature	-40 °C	—	+85 °C
Relative humidity (non-condensing)	5%	—	95%

Notes:

¹Specifications are worst case end-of-life over specified temperature and wavelength range

Channel Plan

Channel	Frequency (GHz)	Wavelength (nm)	Channel	Frequency (GHz)	Wavelength (nm)
20	192	1561.42	40	194.0	1545.32
21	192.1	1560.61	41	194.1	1544.93
22	192.2	1559.79	42	194.2	1543.73
23	192.3	1558.98	43	194.3	1542.94
24	192.4	1558.17	44	194.4	1542.14
25	192.5	1557.36	45	194.5	1541.35
26	192.6	1556.55	46	194.6	1540.56
27	192.7	1555.75	47	194.7	1539.77
28	192.8	1554.94	48	194.8	1538.98
29	192.9	1554.13	49	194.9	1538.19
30	193	1553.33	50	195	1537.40
31	193.1	1552.52	51	195.1	1536.61
32	193.2	1551.72	52	195.2	1535.82
33	193.3	1550.92	53	195.3	1535.04
34	193.4	1550.12	54	195.4	1534.25
35	193.5	1549.32	55	195.5	1533.47
36	193.6	1548.51	56	195.6	1532.68
37	193.7	1547.72	57	195.7	1531.90
38	193.8	1546.92	58	195.8	1531.12
39	193.9	1546.12	59	195.9	1530.33

Ordering information¹

PN	Description
XM40-QD20L9	40-channel Multiplexer/Demultiplexer with Test Channel, ITU Channels 20-59, 1U
XM40-QD20LD	40-channel Multiplexer/Demultiplexer with Test Channel, ITU Channels 20-59, 2U
XM40-QB20L9	40-channel Multiplexer/Demultiplexer with Test Channel, ITU Channels 20-59, 1U, 1310 nm wide filter
XM40-QB20LD	40-channel Multiplexer/Demultiplexer with Test Channel, ITU Channels 20-59, 2U, 1310 nm wide filter

Notes:

¹ For accurate order specification please contact Xenopt reseller before placing an order. The content of this document is subject to change without notice. Xenopt does not guarantee errorless or outdated information. Please specify any compatibility requirements at time of ordering.

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by XenOpt before they become applicable to any particular order or contract. In accordance with the XenOpt policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of XenOpt or others. Further details are available from any XenOpt sales representative.

To find out more, please contact: