




# XTM85B-M1Lx

## 16 G FC 850 nm Digital Diagnostic LC Multi-Mode SFP+ Transceiver

16 G FC 850 nm Digital Diagnostic LC Multi-Mode

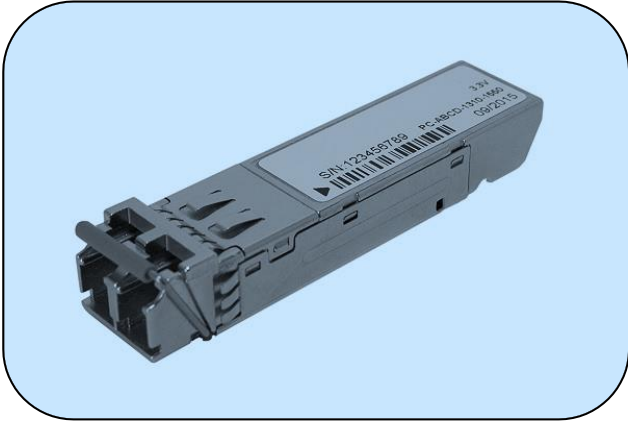

### Applications

- Multi-rate 16x/8x/4x Fiber Channel
- 10 G FCoE

### Features

- Up to 14.025 Gb/s Bi-directional Data Link
- Complaint to SFP+ MSA
- Compliant with 16 G FC 1600-SN
- Compliant with 8 G, 4 G Fibre Channel
- Compliant with 10 G Fibre Channel
- Built-in CDR with Shut-off Control
- Link Distance at 14.025 Gbd
- 35 m links with 50/125 mm MMF Cables
- 100 m links with OM3 MMF Cables
- 125 m links with OM4 MMF Cables
- SFF-8472 Digital Diagnostic Function
- Single +3.3 V Power Supply
- RoHS 6/6 Compliant
- 0° to 70°C Operation: XTM85B-M1LY
- -5° to 85°C Operation: XTM85B-M1LE
- -40° to 85°C Operation: XTM85B-M1LM
- Class 1 Laser International Safety Standard IEC 60825 Compliant
- Enhanced EWRAP, OWRAP operational features

### Product description

The XTM85B-M1Lx series multi-mode transceiver is SFP+ module for bi-directional serial optical data communications such as 16x/8x/4x Fibre Channel. It is with the SFP+ 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I<sup>2</sup>C. This module is designed for multi-mode fibre and operates at a nominal wavelength of 850 nm. The transmitter section uses a Vertical Cavity Surface Emitted Laser (VCSEL) and is a Class 1 laser compliant according to International Safety Standard IEC 60825. The receiver section uses an integrated GaAs detector preamplifier (IDP) mounted in an optical header and a rate selection clock data recovery (CDR) IC.

### Absolute maximum rating

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Parameters	Symbol	Min.	Max.	Unit
Power Supply Voltage	Vcc	0	4	V
Storage Temperature	Tstg	-40	85	°C
Operating Case Temperature	Topr	0 [1]	70	°C
		-5 [2]	85	
		-40 [3]	85	
Operating Relative Humidity [4]	RH	0	85	%

#### Notes:

[1] XTM85B-M1LY

[2] XTM85B-M1LE

[3] XTM85B-M1LM

[4] Non condensing

### Recommended operating environment

Parameters	Symbol	Min.	Typical	Max.	Unit
Power Supply Voltage	VCC	3.14	3.3	3.46	V
Storage Temperature	Tstg	-40		85	°C
Operating Case Temperature	Topr	0 [1]		70	°C
		-5 [2]		85	
		-40 [3]		85	
Power Supply Current	I <sub>cc</sub> (TX+RX)	0		290	mA [4]
Data Rate		4.25	14.025		Gb/s

#### Notes:

[1] XTM85B-M1LY

[2] XTM85B-M1LE

[3] XTM85B-M1LM

[4] With established link

**Transmitter Optical Specifications (0°C < Topr < 70oC, 3.13V < Vcc < 3.47V)**

Parameters	Symbol	Min.	Typical	Max.	Unit
Average Launch Power [1]	Po, Avg	-7.8			dBm
Output Centre Wavelength	$\lambda_c$	840	850	860	nm
Output Spectrum Width [2]	$\Sigma\lambda$			0.59	nm
Optical Modulation Amplitude @4.25 Gb/s	OMA	247			$\mu$ W
Optical Modulation Amplitude @8.5 Gb/s	OMA	302			$\mu$ W
Optical Modulation Amplitude @14.025 Gb/s	OMA	331			$\mu$ W
Vertical Eye Closure Penalty @14.025 Gb/s	CEVPQ			2.56	dB
Relative Intensity Noise	RIN			-128	dB/Hz

**Notes:**

[1] Max Po: Class 1 Laser Safety limit per CDRH and IEC/EN 60825. Output power is power coupled into a 50/125  $\mu$ m multi-mode fibre (average).

[2] RMS ( $\sigma$ )

**Receiver Optical Specifications (0°C < Topr < 70oC, 3.13V < Vcc < 3.47V)**

Parameters	Symbol	Min.	Typical	Max.	Unit
Receiver OMA Sensitivity @4.25 Gb/s [1]	RxSENS			61	mW
Receiver OMA Sensitivity @8.5 Gb/s [1]	RxSENS			76	mW
Receiver OMA Sensitivity @14.025 Gb/s [1]	RxSENS			89	mW
Stress Receiver OMA Sensitivity @14.025 Gb/s [1]	Sens		---	-7.7	dBm
Receiver Overload	PMAX	0	---		dBm
LOS – Deasserted [2]	LOSD	---	---	-13	dBm
LOS – Asserted [2]	LOSA	-24	---	---	dBm
Wavelength of Operation	$\lambda_c$	770		860	nm
Optical Return Loss	ORL			-12	dB

**Notes:**

[1] Measured with worst ER; BER < 10<sup>-12</sup> and PRBS 231-1.

[2] Transition: low to high.

### Electrical characteristics

Parameters	Symbol	Min.	Typical	Max.	Unit
<b>High-Speed Signal (CML) Interface Specification</b>					
Input Data Rate		4.25	14.025		Gb/s
Differential Input Impedance	R <sub>in</sub>		100		Ω
Differential Data Input Amplitude [1]		150		700	mVpp
Output Data Rate		4.25	14.025		Gb/s
Differential Output Impedance [1]	R <sub>out</sub>		100		Ω
Differential Data Output Amplitude		350	600	700	mVpp
<b>Low-Speed Signal (LVTTTL) Interface Specification</b>					
Input High Voltage		2.0		V <sub>cc</sub> +0.3	V
Input Low Voltage		GND		0.8	V
Output High Voltage		2.4		V <sub>cc</sub>	V
Output Low Voltage		GND		0.5	V

#### Notes:

[1] Measured with worst ER; BER < 10<sup>-12</sup> and PRBS 231-1.

### Link Length

Parameters	Symbol	Min.	Typical	Max.	Unit
Fibre Length on 50/125 mm MMF	L			150 [1] 50 [2] 35 [3]	m
Fibre Length on 50/125 mm high-bandwidth (OM3) MMF	L			380 [1] 150 [2] 100 [3]	m


#### Notes:

[1] At 4.25 Gb/s Fibre Channel data rate

[2] At 8.5 Gb/s Fibre Channel data rate

[3] At 14.025 Gb/s Fibre Channel data rate

Connection Diagram

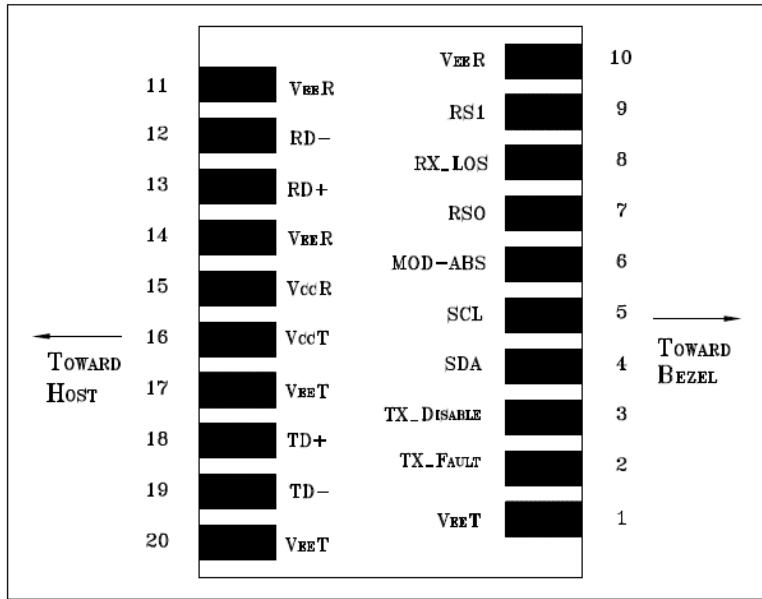

### Pin definition


PIN	Signal Name	Description	PIN	Signal Name	Description
1	VEET	Transmitter Signal Ground	11	VEER	Receiver Signal Ground
2	TX_Fault	Transmitter Fault Indication. Logic "1" Output = Laser Fault. Logic "0" Output = Normal operation	12	RD-	Inverse Receiver Data Out
3	TX_Disable	Logic "1" Input (or no connection) = TX off, Logic "0" = TX on.	13	RD+	Receiver Data Out
4	SDA	Modulation Definition 2 – Two wires serial ID Interface	14	VEER	Receiver Signal Ground
5	SDL	Modulation Definition 1 – Two wires serial ID Interface	15	VCCR	Receiver Power – 3.3V±5%
6	MOD-ABS	Modulation Absent, connected to VEET or VEER in the module.	16	VCCT	Transmitter Power – 3.3V±5%
7	RS0	RX Rate Select: This pin has an internal 30k pulldown to ground. A signal on this pin will not affect module performance.	17	VEET	Transmitter Signal Ground
8	RX_LOS	Loss of Signal Out (OC).	18	TD+	Transmitter Data In
9	RS1	TX Rate Select. This pin has an internal 30k pulldown to ground. A signal on this pin will not affect module performance.	19	TD-	Inverse Transmitter Data In
10	VEER	Receiver Signal Ground	20	VEET	Transmitter Signal Ground

### Module Definition

Module Definition	PIN 4	PIN 5	PIN 6	Interpretation by Host
4	SDA	SCL	MOD-ABS	Serial module definition protocol


Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, SDA and SDL appear as no connector (NC) and MOD-ABS is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E<sup>2</sup>PROM protocol of the ATMEL AT24C01A/02/04 family of components.

Recommended Circuit Schematic

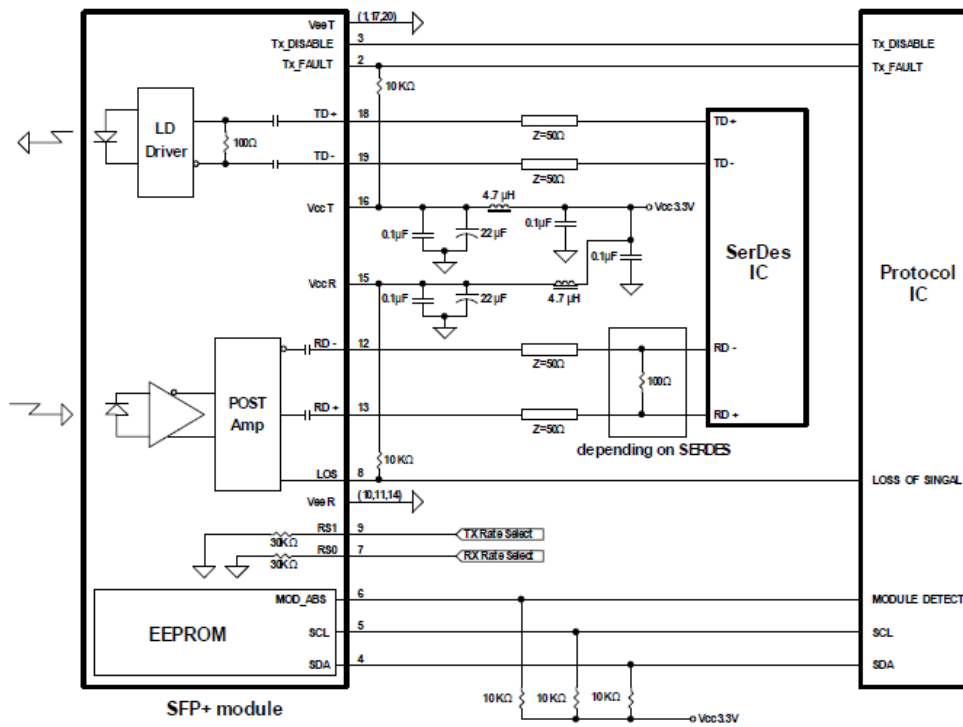

Package Diagram

Units in mm

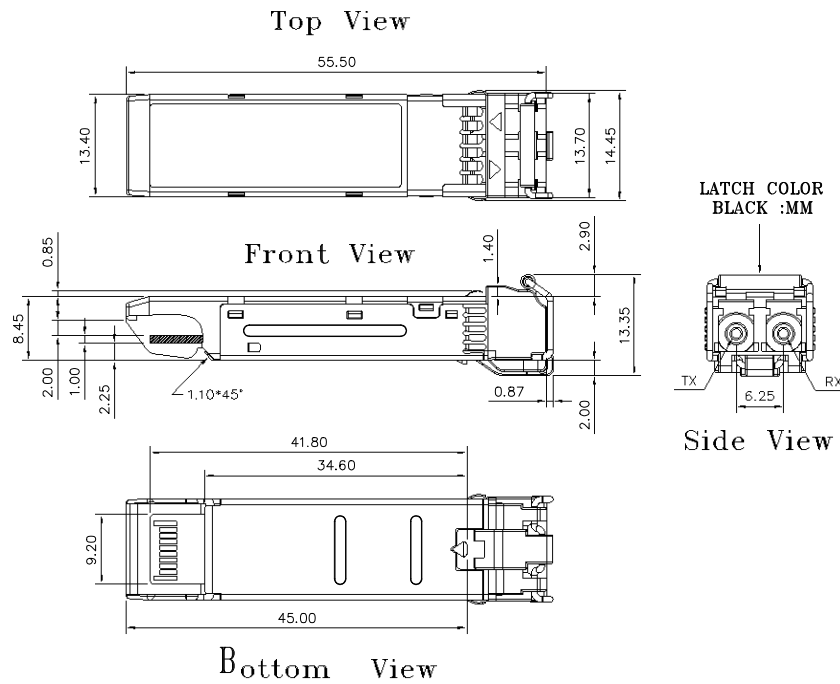


Note: Specifications subject to change without notice.

**Wrap Operation Functions – Soft Control (Address A2h, Byte 111)**

To assist with local host or remote diagnostic and optimization sequences, electrical and optical wrap functions can be enabled. Optical wrap (OWRAP) takes the received optical signal through CDRs and retransmits it optically out. Electrical wrap (EWRAP) takes the received electrical signal through CDRs and retransmits it electrically out. Optional forward functions can be transmitted outbound the wrapped information via i2c control.


Byte	Bit	Name	Description
111	4-7	Reserved	Reserved.
	3	OWRAP Forward Enable Bit	When set in combination with OWRAP Enable, OWRAP Forward routes incoming SFP+ Rx optical data to both the Tx optical output and the Rx electrical output. Enabling sets bit 2 and clears all other bits in byte 111.
	2	OWRAP Enable Bit	When set, OWRAP routes incoming SFP+ Rx optical data to the Tx optical output. Enabling clears all other bits in byte 111.
	1	EWRAP Forward Enable Bit	When set in combination with EWRAP Enable, EWRAP Forward routes incoming SFP+ Tx electrical data to both Rx electrical output and Tx optical output. Enabling sets bit 0 and clears all other bits in byte 111.
	0	EWRAP Enable Bit	When set, EWRAP Enable routes incoming SFP+ Tx electrical data to the Rx electrical output. Enabling clears all other bits in byte 111.

**OWRAP FORWARD ENABLE MODE (I2C CONTROLLED)**

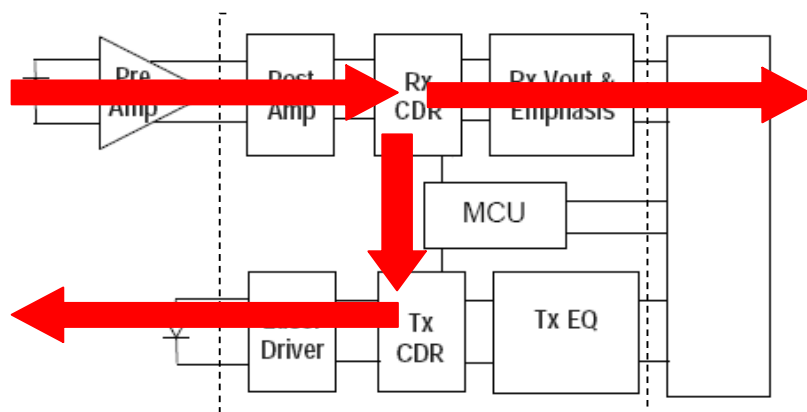





**OWRAP ENABLE MODE (I2C CONTROLLED)**

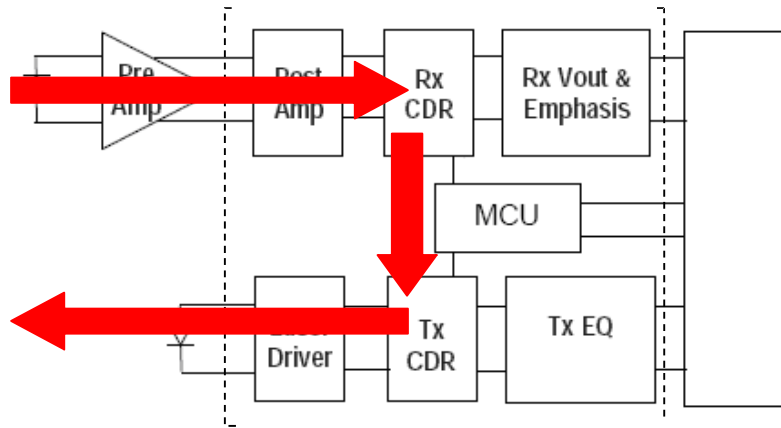

**EWRAP FORWARD ENABLE MODE (I2C CONTROLLED)**

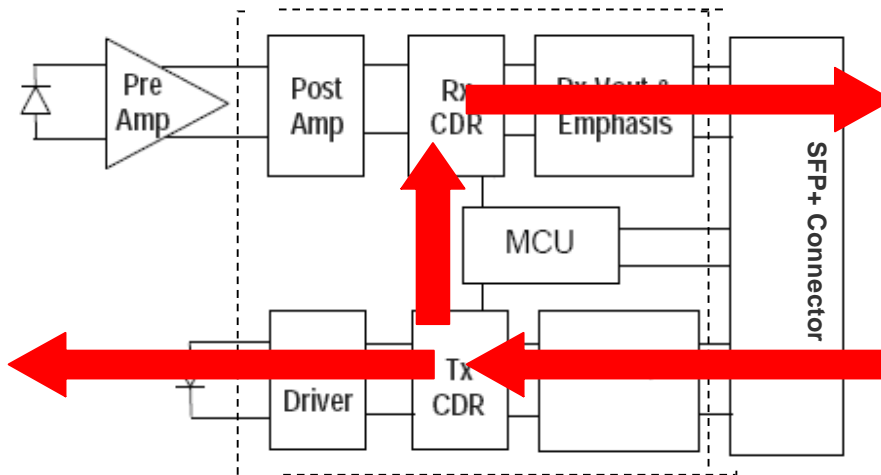

**EWRAP ENABLE MODE (I2C CONTROLLED)**

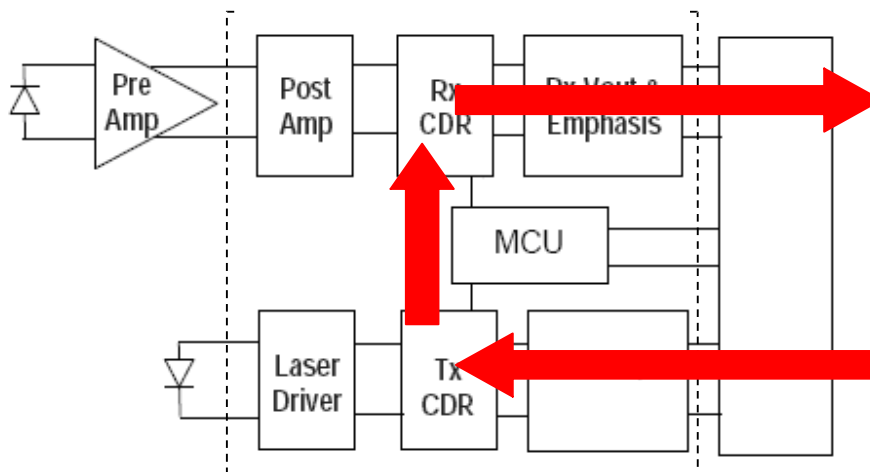

**EEPROM Series ID Memory Contents (Address A0h)**

Addr.	Hex	ASCII	Note	Addr.	Hex	ASCII	Note	Addr.	Hex	ASCII	Note	Addr.	Hex	ASCII	Note	
0	03		SFP+	32	20			64	00		Uncooled Tx, Txdis, Txfault, LOS enable	96	00		Vendor specific EEPROM	
1	04			33	20			65	1A				97	00		
2	07		LC	34	20			66	00			Up bitrate	98	00		
3	10		10G Base-SR	35	20			67	00			Lowbit rate	99	00		
4	00			36	00		NA	68			Serial number: each piece with different serial number	100	00			
5	00			37	00		Vendor IEEE	69					101	00		
6	00			38	0E		OUI	70					102	00		
7	60		Short (S) and Intermediate (I) Distance	39	FA			71					103	00		
8	40		Shortwave Laser w/o OFC (SN)	40	53	S	Part Number	72				104	00			
9	0C		Multimode (M6, M5, M5E)	41	50	P			73				105	00		
10	F0		1600/1200/800/400 Mbytes/sec	42	4D	M			74				106	00		
11	06		64B/66B	43	2D	-			75				107	00		
12	8C		14.025Gbps	44	36	6			76				108	00		
13	00			45	31	1			77				109	00		
14	00			46	30	0			78				110	00		
15	00			47	30	0			79				111	00		
16	04		OM2 50/125um MME	48	57	W			80				112	00		
17	02		OM1 62.5/125um	49	47	G			81				113	00		
18	00			50	20			82				114	00			
19	0A		OM3 50/125um MME	51	20			83				115	00			
20	4F	X	Vendor name	52	20			84			Date Code	116	00			
21	50	E			53	20			85					117	00	
22	54	N			54	20			86					118	00	
23	4F	O			55	20			87					119	00	
24	57	P			56	30	0	Revision, depended on version	88				120	00		
25	41	T			57	30	0			89				121	00	
26	59				58	30	0			90				122	00	
27	20				59	31	1		91				123	00		
28	20				60	03		850nm	92	68		Monitoring	124	00		
29	20				61	52				93	F0		Soft Control and Monitoring	125	00	
30	20			62	00		Reserved	94	05		SFF-8472V11.0	126	00			
31	20			63			Checksum 0-62	95			Checksum 64-94	127	00			

## EEPROM Series ID Memory Contents (Address A2h)

Addr.	Hex	Note	Addr.	Hex	Note	Addr.	Hex	Note	Addr.	Hex	Note
0	4B	Temp.High Alarm (75oC)	32	31	Rx Power High Alarm (1dBm)	64	00	For External Cal.	96		Real TimeTemp. MSB
1	00		33	2D		65	00	For External Cal.	97		Real TimeTemp.LSB
2	FB	Temp. Low Alarm(-5oC)	34	02	Rx Power Low Alarm (-12.5dBm)	66	00	For External Cal.	98		Real Time Vcc MSB
3	00		35	32		67	00	For External Cal.	99		Real Time Vcc LSB
4	49	Temp.High Warming(73oC)	36	27	Rx Power High Warming(0dBm)	68	3F	For External Cal.	100		Real Time Tx Bias MSB
5	00		37	10		69	80	For External Cal.	101		Real Time Tx Bias LSB
6	00	Temp. Low Warming(0oC)	38	03	Rx Power Low Warming(-10.5dBm)	70	00	For External Cal.	102		Real Time Tx Pwr MSB
7	00		39	7B		71	00	For External Cal.	103		Real TimeTx Pwr LSB
8	8C	Voltage High Alarm (3.6V)	40	00	Reserved	72	00	For External Cal.	104		Real Time Rx Pwr MSB
9	A0		41	00	Reserved	73	00	For External Cal.	105		Real Time Rx Pwr LSB
10	75	Voltage Low Alarm(3.0V)	42	00	Reserved	74	00	For External Cal.	106		Reserved
11	30		43	00	Reserved	75	00	For External Cal.	107		Reserved
12	88	Voltage High Warming(3.5V)	44	00	Reserved	76	01	For External Cal.	108		Reserved
13	B8		45	00	Reserved	77	00	For External Cal.	109		Reserved
14	79	Voltage Low Warming (3.1V)	46	00	Reserved	78	00	For External Cal.	110		TxDis,Tx Fault, Rx Los
15	18		47	00	Reserved	79	00	For External Cal.	111		OWRAP, EWRAP
16	27	Tx Bias High Alarm(20mA)	48	00	Reserved	80	01	For External Cal.	112		Alarm Flag
17	10		49	00	Reserved	81	00	For External Cal.	113		Alarm Flag/Reserved
18	01	Tx BiasLow Alarm(1mA)	50	00	Reserved	82	00	For External Cal.	114		Reserved
19	F4		51	00	Reserved	83	00	For External Cal.	115		Reserved
20	1D	Tx Bias High Warming(15mA)	52	00	Reserved	84	01	For External Cal.	116		Warming Flag
21	4C		53	00	Reserved	85	00	For External Cal.	117		WarmingFlag/Reserved
22	03	Tx Bias Low Warming(2mA)	54	00	Reserved	86	00	For External Cal.	118		Reserved
23	E8		55	00	Reserved	87	00	For External Cal.	119		Reserved
24	27	Tx Power High Alarm (0dBm)	56	00	For External Cal.	88	01	For External Cal.	120		Vendor Specific
25	10		57	00	For External Cal.	89	00	For External Cal.	121		
26	05	Tx Power Low Alarm(-8.8dBm)	58	00	For External Cal.	90	00	For External Cal.	122		
27	26		59	00	For External Cal.	91	00	For External Cal.	123		
28	1F	Tx Power High Warming(-1dBm)	60	00	For External Cal.	92	00	For External Cal.	124		
29	07		61	00	For External Cal.	93	00	For External Cal.	125		
30	06	Tx Power Low Warming(-7.8dBm)	62	00	For External Cal.	94	00	For External Cal.	126		
31	7C		63	00	For External Cal.	95		Check Sum	127		

Note: Address 128 – 247: customer R/W eeprom. Address 248 – 255: Vendor Specific.

Note: Specifications subject to change without notice.

## LASER SAFETY

This multi-mode transceiver is a Class 1 laser product. It complies with IEC 60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

## Ordering information

PN	Bit Rate (GB/s)	FC	Distance (m)	Wavelength (nm)	Package	Temp (C)
XTM85B-M1LY	14.025	16G/8G/4G	35/100/125*	850 VCSEL	SFP+ with DMI	0 to 70
XTM85B-M1LE	14.025	16G/8G/4G	35/100/125*	850 VCSEL	SFP+ with DMI	-5 to 85
XTM85B-M1LM	14.025	16G/8G/4G	35/100/125*	850 VCSEL	SFP+ with DMI	-40 to 85

\*: 35 m for OM2 MMF , 100 m for OM3 MMF and 125 m for OM4 MMF. All tested at 14.025 Gb/s.

Notice. Please specify any compatibility requirements at time of ordering. Standard MSA compatible pluggable components may not work or some function of these components may not be available in devices that require customized compatible devices. Pluggable components compatible with one type of communications equipment may not work in other type of communications equipment.

## Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by XenOpt before they become applicable to any particular order or contract. In accordance with the XenOpt policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of XenOpt or others. Further details are available from any XenOpt sales representative.

To find out more, please contact:



www.xenopt.com