




X86-OTDX

XenOpt X8600 OTDX 10G Transponder

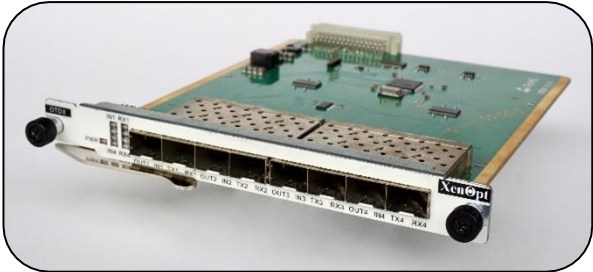

Features

- 4 channel bidirectional transponder card
- With data rate from 1.25 Gbit/s to 11.3 Gbit/s
- Provides 3R regeneration of signals that pass the transponder
- Provides Loopback testing mode
- Converts wide band optical signals to standard DWDM/CWDM wavelengths
- Supports wide range of services like: 1GbE, 10GbE, STM-16/64, FC 1G/2G/4G/8G/10G, FICON, FICON Express, ESCON, CPRI: 1.23/2.46/6, 14/9.83 Gbit/s, OTN: OTU2, OTU2V


Application

- Conversion and regeneration of signals for 1 to 10 Gb services in WDM transport systems

Description

X86-OTDX is a 4-channel transponder card. All ports have SFP+ interface on line and network side that allow insertion of SFP and SFP+ standard pluggable devices that supports transmission speed from 1.25 Gbit/s to 11.3 Gbit/s. Transponder provides 3R signal regeneration (reamplification, reshaping, retiming). Module can provide loopback function on all 8 ports. Error threshold levels can be user defined. Loopback function can be used for diagnostics and to create up to 8 channel unidirectional transceiver for special applications like Video distribution.

Functional diagram

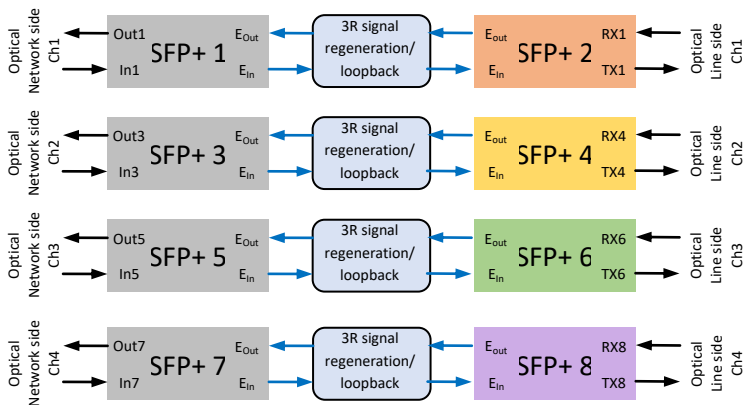

Technical Specifications

Parameter	Technical Indicators
Product model	X86-OTDX
Function	<ul style="list-style-type: none"> ● Quad transponder with rates from 1.25 Gbit/s to 11.3 Gbit/s ● It supports unidirectional transmission of 8-channel services with any rate from 1.25 Gbit/s to 11.3 Gbit/s
Service type	<ul style="list-style-type: none"> ● GE, 10GE, STM-16/64, ● FC 1G/2G/4G/8G/10G, FICON, FICON Express, ESCON ● CPRI: 1.23/2.46/6, 14/9.83 Gbit/s, OTN:OTU2, OTU2V
Size	Occupies 1 slot of X8600 series chassis
WDM technology	All ports can be used with SFP and SFP+ pluggables of following types: (wideband) LX, SX, any of 18 CWDM wavelengths with reach of up to 120km or any of DWDM C or L Band with 100 GHz or 50 GHz spacing with reach of up to 80km
Signal regeneration	Support 3R function: Re-amplifying, Re-timing, Re-shaping
Network management functions	<ul style="list-style-type: none"> ● Supports real time monitoring of port status, including: transmitting optical power, receiving optical power, temperature, voltage and current for each transceiver module ● Supports selecting operating rate of each port ● Supports port loopback and port shutdown
Interface	8x SFP/ SFP+ ports
Typical power consumption	20 W (depending on pluggables used)
MTBF	> 100000 hours

Ordering information

Part number	Product Description
X86-OTDX	XenOpt X8600 OTDX Quad 10G Transponder

Notes

¹ For accurate order specification please contact XenOpt reseller before placing an order. The content of this document is subject to change without notice.

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by XenOpt before they become applicable to any particular order or contract. In accordance with the XenOpt policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of XenOpt or others. Further details are available from any XenOpt sales representative.

To find out more, please contact:



www.xenopt.com