

## XSI351-02Lx

SFP BiDi 1.25 Gbps 2 km Reach  
Tx 1310 nm/Rx 1550 nm Transceiver



### Applications

- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems

### Description

The SFP-BIDI transceivers are high performance, cost effective modules supporting dual data-rate of 1.25 Gbps/1.0625 Gbps and 2KM transmission distance with MMF.


The transceiver consists of three sections: a FP laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

### Features

- Dual data-rate of 1.25 Gbps/1.063 Gbps operation
- 1310 nm FP laser and PIN photodetector for 2 km transmission over MMF
- Compliant with SFP MSA and SFF-8472 with simplex LC receptacle
- Digital Diagnostic Monitoring: Internal Calibration or External Calibration
- Compatible with SONET OC-24-LR-1
- +3.3 V single power supply
- Operating Case Temperature Range  
0 °C to 75 °C (Commercial)  
-40 °C to 85 °C (Industrial)
- RoHS 6 compliant

Block Diagram

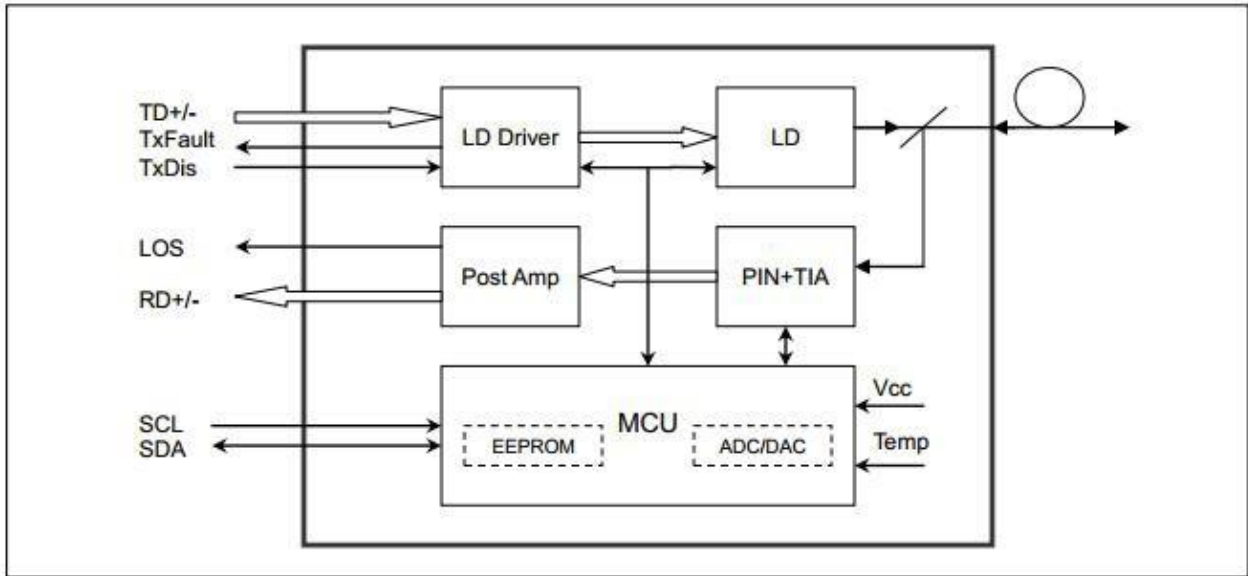

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Storage Temperature	Ts	-40		85	°C	
Maximum Supply Voltage	Vcc	-0.5		4.7	V	
Operating case temperature	TOP	0		70	°C	

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Diff. input voltage swing		120		820	mVpp	1
Tx Disable input	H	VIH	2.0	Vcc+0.3	V	
	L	VIL	0	0.8		
Tx Fault output	H	VOH	2.0	Vcc+0.3	V	2
	L	VOL	0	0.8		
Input Diff. Impedance	Zin		100		Ω	
<b>Receiver</b>						
Diff. output voltage swing		340	650	800	mVpp	3
Rx LOS Output	H	VOH	2.0	Vcc+0.3	V	2
	L	VOL	0	0.8		

Notes

1. TD+/- are internally AC coupled with 100Ω differential termination inside the module.
2. Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and Vcc+0.3V.
3. RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES

## Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Operating Wavelength	$\lambda_C$	1260	1310	1360	nm	
Ave. output power (Enabled)	$P_o$	-9		-4	dBm	1
Extinction Ratio	ER	10			dB	1
RMS spectral width	$\Delta\lambda$			4	nm	
Rise/Fall time (20%~80%)	$T_r/T_f$			0.26	ps	2
Output Eye Mask	Telcordia GR-253-CORE and ITU-T G.957 compatible					
<b>Receiver</b>						
Operating Wavelength		1470		1510	nm	
Sensitivity	$P_{sen}$			-22	dBm	3
Min. overload	$P_{imax}$	-3			dBm	
LOS Assert	$P_a$	-36			dBm	
LOS De-assert	$P_d$			-24	dBm	4
LOS Hysteresis	$P_d-P_a$	0.5		6	dB	

### Notes

1. Measure at  $2^{23}-1$  NRZ PRBS pattern
2. Transmitter eye mask definition
3. Measured with Light source 1310nm (1550nm), ER=10dB; BER =  $<10^{-12}$  @PRBS= $2^{23}-1$  NRZ.
4. When LOS de-asserted, the RX data+/- output is signal output.

### Ordering information<sup>1</sup>

Part number	Product Description
XSI351-02LY	SFP BiDi, 1.25 Gbps, 2 km reach, LC, Tx 1310/Rx 1550 nm, 0°C~70°C, DDMI
XSI351-02LM	SFP BiDi, 1.25 Gbps, 2 km reach, LC, Tx 1310/Rx 1550 nm, -40°C~70°C, DDMI

**Notes**

<sup>1</sup> For accurate order specification please contact XenOpt reseller before placing an order. The content of this document is subject to change without notice. XenOpt does not guarantee errorless or outdated information.

Please specify any compatibility requirements at time of ordering. Standard MSA compatible pluggable components may not work or some function of these components may not be available in devices that require customized compatible devices. Pluggable components compatible with one type of communications equipment may not work in other type of communications equipment.

**Important Notice**

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by XenOpt before they become applicable to any particular order or contract. In accordance with the XenOpt policy of continuous improvement specifications may change without notice.

The product image is only for reference purpose

The publication of information in this data sheet does not imply freedom from patent or other protective rights of XenOpt or others. Further details are available from any XenOpt sales representative.

To find out more, please contact: