



XIDS-740/746

4G ports Gigabit Advanced Managed Industrial Ethernet Switch



Overview

The XenOpt XIDS-740/746 series managed Industrial Ethernet switches are equipped with up to 4 Ethernet ports. The "Fi Ring" redundant Ring (recovery time < 20ms), RSTP/STP can increase system reliability and network availability. The elevated hardware reliability is especially suitable for industrial applications.


Features

- XIDS-740: 8x10/100BaseTX ports+2x100BaseFX+4x1000BaseX (SFP slots)
- XIDS-746: 16x10/100BaseTX ports+4x1000BaseTX (SFP slots)
- Command Line Interface (CLI) for quickly configuration major managed functions
- IEEE1588 PTP V2(PrecisionTime Protocol) for precise time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
- FMC Ring Protocol "Fi Ring" (recovery time < 20 ms), RSTP, STP and MSTP for network redundancy
- IGMP snooping for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Support port mirroring
- Support Access Control List(ACL)
- Storm control for any combination of multicast,broadcast and DLF traffic control
- QoS and ToS/DiffServ to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability Bandwidth management prevents unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic alarm through e-mail, relay output
- Works with most network management software for traffic monitoring and easy network troubleshooting

Product Highlights

- Designed for tough environment:
 - Operating temperature ranges from -40 to +75 °C
 - Fan-free design
 - Redundant power
- Networking features:
 - 4 Gigabit ports for dual Gigabit redundant
 - Comply with IEC61850-3 and IEEE 1613 standard
 - Integrated management, monitoring and alarms via web browser, CLI, Telnet /serial console, Windows utility and SNMP
 - Support STP, RSTP, and protocol "Fi Ring" (Recovery Time<20 ms)
 - SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network
- DIN Rail mount

Specifications

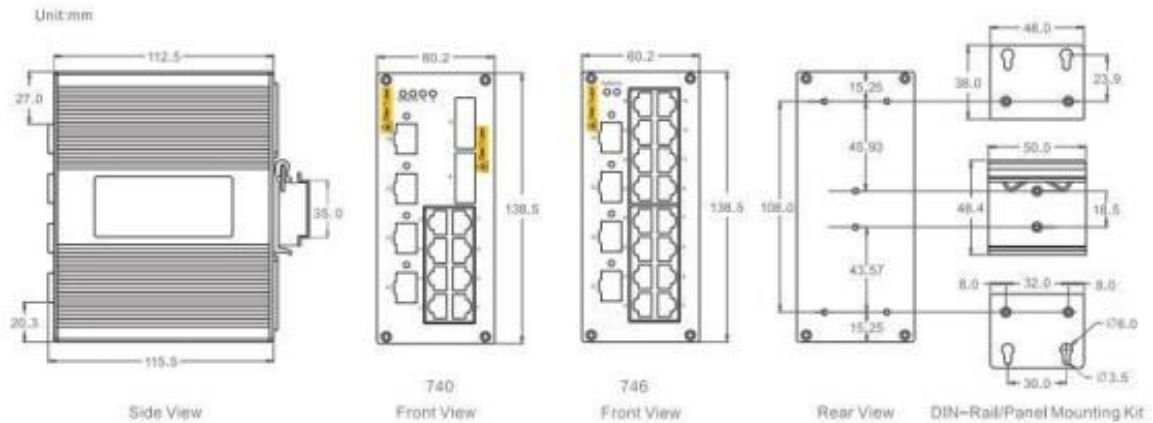

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3z
- IEEE 802.1D-2004 for STP
- IEEE 802.1w for Rapid STP
- IEEE 802.1s Multiple STP
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1X for Authentication
- IEEE 802.3ad for Port Trunk with LACP
- IEEE 802.3x for Flow Control

Protocols:

- IGMPv1/v2
- GVRP
- SNMPv1/v2c/v3
- DHCP Client
- TFTP
- SMTP
- RMON
- HTTP
- HTTPS
- Telnet
- Syslog
- SSH
- SNMP Inform
- SNTTP Server/Client

Flow Control:

- IEEE 802.3x flow control
- back pressure flow control

Management Information Base (MIB):

- MIB-II
- Ethernet-Like MIB
- P-BRIDGE MIB
- Q-BRIDGE MIB
- Bridge MIB
- RSTP MIB
- RMON MIB Group 1, 2, 3, 9

Switch Properties:

- Priority Queues: 4
- Max. Number of Available VLANs: 4094
- VLAN ID Range: VID 1 to 4094
- IGMP Groups: 256
- MAC Table Size: 8K
- Packet Buffer Size: 2 Mbit

Interface:

- Fiber Ports: 1000BaseX (SFP slots), 100Base FX (SC Connector)
- RJ45 Ports: 10/ 100BaseTX auto negotiation
- Console Port: RS-232 (RJ45 connector)
- Alarm Contact: 2 relay outputs with current carrying capacity of 1A@24V

Power Requirements:

- Input Voltage: 24 VDC (18 to 36VDC), redundant dual inputs
- Input Current:
 - XIDS-740: 0.55A@24VDC
 - XIDS-746: 0.55A@24VDC
- Overload Current Protection: Present
- Reverse Polarity Protection: Present
- Connector: 6-contact terminal blocks

Mechanical Properties:

- Housing: Metal, IP30 protection
- Dimensions: 60.2 x 115.5 x 138.5 mm
- Weight: 760g
- Installation: DIN-Rail mounting, wall mounting

Environmental Limits:

- Operating Temperature:
 - Standard Models: 0 to +60°C (32 to 140°F)
 - Wide Temp. Models: -40 to +75°C (-40 to 167°F)
- Storage Temperature: -40 to +85°C (-40 to 185°F)
- Ambient Relative Humidity: 5 to 95% (non-condensing)

Standards and Certifications:

- Safety: UL 60950-1
- EMI: FCC Part 15 Subpart B Class A, EN 55022 Class A EMS:
 - EN 61000-4-2 (ESD) Level 3, EN61000-4-3 (RS) Level 3, EN 61000-4-4 (EFT) Level 3, EN 61000-4-5 (Surge) Level 3, EN 61000-4-6 (CS) Level 3, EN 61000-4-8 Level 3
- Shock: IEC 60068-2-27
- Frefall: IEC 60068-2-32
- Vibration: IEC 60068-2-6

Warranty Period:

- 5years

Ordering information

Part Number	Product Description
XIDS-740	Industrial Switch, 6x10/100BaseTX ports+3x1000BaseX (SFP slots)
XIDS-746	Industrial Switch, 7x10/100BaseTX ports+1x10/100/1000BaseTX

Note : XIDS-740/746 series support up to 3 1000BaseX (SFP slots). Please find the compatible SFP modules in the accessories list below.

IDS 740/746 accessories - Transceivers

Part Number	Product Description
SFP	
XSM851-M5Lx	SFP 1.25 Gbps, 850 nm MMF 500 m, -40°C ~ +85°C
XSM311-02Lx	002 2Km Dual-fiber MMF1310nm, -40°C ~ +85°C
XSS311-20Lx	020 20Km Dual-fiber SMF1310nm, -40°C ~ +85°C
XSS311-40Lx	040 40Km Dual-fiber SMF1310nm, -20°C
XSS311-60Lx	060 60Km Dual-fiber SMF1310nm ni v prospektu
XSS551-80Lx	080 80Km Dual-fiber SMF1550nm, -20°C
XSS551-C0Lx	120 120Km Dual-fiber SMF1550nm, -20°C
XSB311-20Lx	20A 20Km BiDI SMF 1310nm 0°C
XSB551-20Lx	20B 20Km BiDI SMF 1550nm 0°C
XSB311-40Lx	40A 40Km BiDI SMF 1310nm 0°C
XSB551-40Lx	40B 40Km BiDI SMF 1550nm 0°C
XSB311-60Lx	60A 60Km BiDI SMF 1310nm ni v prospektu
XSB551-60Lx	60B 60Km BiDI SMF 1550nm ni v prospektu
XSB311-80Lx	80A 80Km BiDI SMF 1310nm 0°C
XSB551-80Lx	80B 80Km BiDI SMF 1550nm 0°C
XC6-UTUTTC0	Cable, 1 GbE Cu UTP Cat 6A, length: 100 m

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by XenOpt before they become applicable to any particular order or contract. In accordance with the XenOpt policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of XenOpt or others. Further details are available from any XenOpt sales representative.

To find out more, please contact:



www.xenopt.com